

Experimental study of ISHTAR thermostatic irradiation device for the MARIA research reactor

Maciej Lipka*, Anna Talarowska, Grzegorz Wojtania, Marek Migdal

National Centre for Nuclear Research, Poland

*corresponding author: Maciej.lipka@ncbj.gov.pl

Abstract—Materials and core components for the next generation power reactors technologies require testing that can be performed in existing research reactors. Such experiments employ devices dedicated to reflect the relevant thermal and neutron parameters simulating conditions present in, for example, but not limited to, HTGR reactors. A novel thermostatic irradiation device named ISHTAR (Irradiation System for High-Temperature Reactors) has been designed and constructed in the MARIA research reactor. Its mission is to enable irradiation of samples in controlled, homogeneous temperature field reaching 1000°C and inert gas atmosphere. The high temperature is achieved by a combination of electric and gamma heating, together with carefully designed thermal insulation. Additionally, samples holder made of graphite with high thermal conductivity enables the temperature homogenization in all directions. Device will be placed inside the Beryllium matrix of MARIA core and cooled with forced circulation of water from the reactor pool loop. This paper presents the outcome of experiments conducted with the rig prototype in external hydraulic mock-up of the MARIA reactor irradiation channel. The results have proved that the desired conditions for irradiation of the samples were achieved and their comparison against computational data has shown the adequacy of the design process. Finally, the loss of flow scenario was tested in protected and unprotected conditions (meaning with and without the safety system based on temperature feedback), proving the operational safety of the ISHTAR design. Experimental results will be used in the future to validate the numerical models (two and three dimensional) of the irradiation rig, providing an improved understanding of free convection and radiation phenomena modeling.

Keywords —Research reactor, materials testing, Irradiation, High-temperature Reactor, thermostatic device, MARIA, HTGR

I. INTRODUCTION

MARIA is a channels-in-pool type, water-cooled research reactor. It has a nominal power of 30 MWth with a core containing 20+ individually cooled fuel elements located in pressure tubes. Beryllium blocks and light water provide neutrons moderation. The reactor core is surrounded by the graphite reflector [1]. MARIA's core is highly flexible – fuel channels and beryllium (moderator) blocks might be freely shuffled between the reactor cycles to meet the requirements of the broad scope of irradiation programmes and experimental studies for each operation cycle. Irradiation positions with neutron flux and spectrum optimized for the thermostatic devices programme are presented in Figure 1.

As the High-Temperature Reactors (HTGR or HTR) seem to be considered by the Polish government as a meaningful branch of scientific studies in the field of nuclear energy [2][3] (however separate from the Polish Nuclear Power Programme [4]), the need for the development of thermostatic rig that will enable irradiations in the HTGR conditions emerged. As a result, a state-funded research programme “Gospostrateg-HTR” was initiated. One of its tasks was designing, building, and testing the irradiation rig in the research reactor core. The rig enables graphite samples irradiation in thermal conditions as close as possible to HTGR operating conditions, namely 1000°C and helium gas atmosphere. The initial rig design was carefully optimized to minimize heat flux in axial direction and homogenize the temperature field within the holder filled with materials samples. The optimization process, which leads to the final axial insulation arrangement, required tight cooperation between analysts and design engineers. Test of the prototype was performed to measure thermal and hydraulic conditions in the external mock-up of the vertical irradiation channel of the MARIA reactor – coolant flow correlated with the known pressure drop. When the hydraulic conditions were known (and derived from them – heat transfer coefficient), thermal measurements became possible: the temperature at various points inside and outside the rig was measured to map the temperatures and compare them with calculation results of the measurements to prove the adequacy of the design.

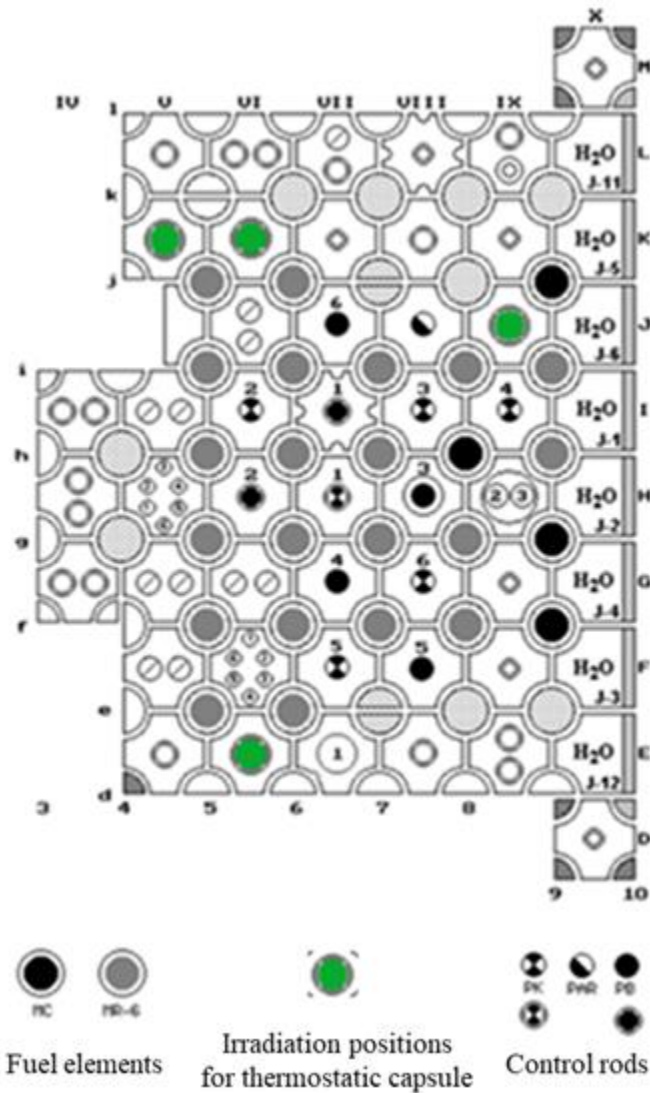


Fig. 1: Irradiation positions in MARIA reactor core

II. ISHTAR DESIGN

The ISHTAR (Irradiation System for High-Temperature Reactors) thermostatic irradiation rig ensure homogenous temperature both by nuclear and electrical heating during in-core irradiation. The prototype used for the mock-up tests has an elevated electrical heating to fill in the nuclear heating during out of the core safety testing procedures.

The main feature of the rig is the homogeneous irradiation temperature of 40 cm specimen's holder length which is quite impressive comparing to the 1 m of active reactor core height. The homogenous temperature of 1000°C was achieved by helium gas insulation layer. The outer diameter of the rig $d = 48.3$ mm can be easily fitted to the vertical channel which internal diameter equals 54 mm. The rig is cooled by the forced convection of water in reactor pool. The main goal of ISHTAR thermostatic device was to demonstrate the possibility of graphite specimen irradiation in high temperatures. The thermostatic device irradiates four graphite

specimen, each 100 mm long. Samples from this irradiation campaign are intended for the pull tests. The samples are fitted with six thermocouples as part of the temperature monitoring inside the thermostatic device. The specimen is implemented inside the rig's tray, with cylindrical loading space of diameter 28 mm and 400 mm long. The tray encapsulating the loading space is wrapped in 7 high-temperature heaters. The heaters are placed in spiral grooves and interlaced at the bottom, allowing both cold ends of each heater directly upwards. The heater interfaces stainless steel sleeve tube's outer diameter allows maintaining 3.15 mm isolating gap between thermostatic device tray and thermostatic device outer tube. The gap is filled with helium with a pressure of 1.5 bar, providing isolation necessary to reach a temperature of 1000°C inside the tray. Thermal expansion shrinks the gap to about 2.85 mm, which was taken into account in the calculations. The upper and lower ends of the tray in the sleeve are additionally isolated by rings manufactured from Zirconium-Yttrium ceramic with low thermal conductivity of $2 \text{ Wm}^{-1}\text{K}^{-1}$ combined with the helium volumes. The whole assembly is locked within the stainless steel (AISI316) cylinder, providing structural rigidity to the assembly. The construction is presented in the Figure 2.




Fig. 2: Geometrical model of the in-core part of the thermostatic device.

- 1 – inner shell, 2 – electrical heater, 3 – samples with holder,
- 4 – outer shell, 5 – "crown" (lower insulation).

III. EXPERIMENTAL SETUP

Due to several major uncertainties (such as coolant velocity in the channel) as well as due to the complex geometry of the heater it is difficult to simulate the temperature field numerically within the rig. Therefore, it has been decided to perform an additional experimental investigation in order to determine cooling parameters and verify technical solutions by performing out-of-core experiments in reactor channel mock-up. It allowed to adequately test selected insulators, connectors, etc. A purpose-designed mock-up of the irradiation channel with full simulation of its cooling capacity has been therefore constructed. The mock-up called FLOW-30 is presented in Figure 3. The transparent structure of the mock-up made out of the plexiglass tubes enables observation of the flow type: laminar or turbulent after the addition of the reagent to water, also boiling and its regimes can be investigated in this manner if they occur.

